


Compact 6000 Counts True RMS Multimeter with Backlight

- Built-in kick stand frees up hands allowing you to work safely and efficiently
- Designed to withstand the rugged environment of a work site and has been drop tested up to 2 meters
- CAT III 600V safety rating



EMC & LVD
EN: 61326
EN: 61010-1
EN: 61010-02-032
EN: 61010-02-033

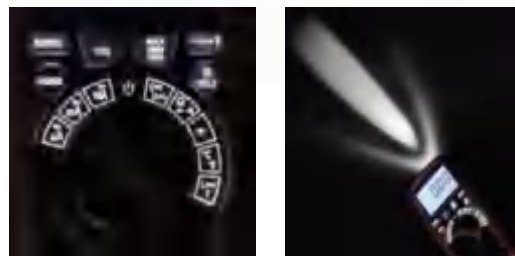

Model 927H/928BT



927 compact 600V True RMS 13-function auto-ranging multimeter with built-in NCV and Live detector.

926 is durable and attractive 600V multimeter for the beginning electrician. 7 Measurement functions including AC and DC voltage, DC current, resistance, diode test, battery test, and continuity provide the capability to tackle any basic electrical task.

	GOOD	LOW	BAD
1.5V	> 1.3V	0.95 to 1.3V	< 0.95V
9V	> 7.7V	5.7 to 7.7V	< 5.7V

Features

	926A	926	927A	927	927H	928BT
Digital display counts with backlit	2000	2000	4000	4000	6000	6000
True RMS measurement	*	*	*	*	*	*
Range selection	Manual	Manual	Auto	Auto	Auto	Auto
MAX/MIN hold			*	*	*	*
0.1~99.9% Duty Cycle measurement				*	*	*
Diode & Continuity buzzer check	*	*	*	*	*	*
Auto Power Off	*	*	*	*	*	*
Display backlight			*	*	*	*
Data Hold/REL measurement	*	*	*	*	*	*
Fast and accurate capacitance measurement				*		
Non-Contact ACV & ACV Live detection			*	*	*	*
Backlight for LCD, Knob Switch, Flashlight					*	*
1.5V and 9V battery test	*	*		*		
Full ranges protection	*	*	*	*	*	*
Drop tested up to 2 meters	*	*	*	*	*	*
Square wave signal output					*	*
Low input Impedance (around 3kΩ)					*	*
Bluetooth interface with Meterbox Pro software						*

Specifications

Function	Max Range	Basic Accuracy	926A	926	927A	927	927H	928BT
Voltage DC	600V	±0.5%	*	*	*	*	1000V	1000V
Voltage AC	600V	±1.2%	*	*	*	*	1000V	1000V
Current DC	10A	±1.5%	*	*	*	*	*	*
Current AC	10A	±2.0%	*	*	*	*	*	*
Resistance	2MΩ	±0.8%	*	*				
	40MΩ	±3.0%			*	*	60MΩ	60MΩ
Capacitance	100mF	±3.5%				4mF	*	*
Frequency	10MHz	±1.5%			*	*	10KHz	10KHz
Temperature	760°C/1400°F	±1.5%			*	*	*	*
Battery test	Test 1.5V and 9V batteries			*		*	*	*
Diode Check				*	*	*	*	*
Continuity Test				*	*	*	*	*

Size(HxWxD): 151mm x 75mm x 45mm Weight: 255g

Accessories: Test leads, 2x1.5V battery and type K temperature probe (927/927A/927H/928BT), clamshell.

• Double molded plastic housing

• True RMS



EMC & LVD
EN: 61326
EN: 61010-1
EN: 61010-02-032
EN: 61010-02-033



Model 926A



Model 927



Model 928BT

Meterbox Pro